

A low-angle shot of a modern glass skyscraper with yellow horizontal accents. The building is partially obscured by a large, dark, curved structure in the foreground, possibly a train station roof. The sky is overcast.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE V3.5



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

User information (1)

- In the past you had to use special forms or Excel sheets for the administration of your partners and trading relations. You had to send this information to central Administration of BusinessMail X.400 who enabled those changes.
- While using the Web Interface (WebConfig) you will be able to directly manage your trading relations without any time lost.
- The menu items for central EDI function (using EDI ID to address your partners) will be visible only if this function has been activated for your MessageGate account.



BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

User information (2)

- If you access WebConfig the first time it is necessary to download a client certificate stored on URL <https://www.service-viat.de> and import it into certificate store of your OS/ browser. If you use different client certificates you must use this new certificate while setting up the communication to WebConfig.
- To register a WebConfig account please contact the Helpdesk of BusinessMail X.400. The registration is free of charge. If you added the necessary information while ordering MessageGate (username, password) the WebConfig account will be configure while configuring the MessageGate account.
- After that you may switch to authentication with personalized certificate.



BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

New features in WebConfig since V3.5

- PKCS#12 archive file will be now AES encrypted. When using older applications, you may choose a compatibility mode (encryption with RC4)




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Secure Communication via Internet (https)

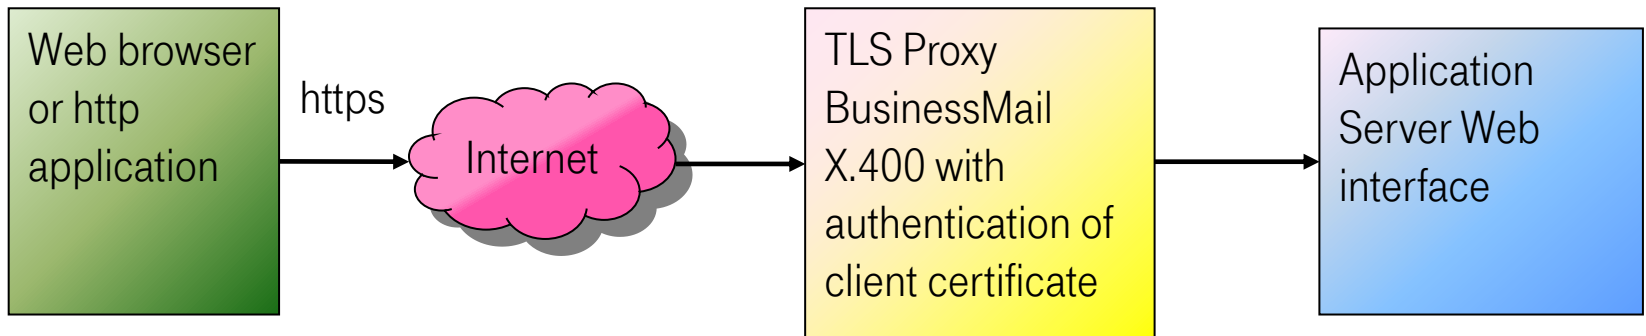

Address <https://webconfig.viat.de/webconfig>

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Features

WebConfig will offer the following features:


- Management of MessageGate properties
- Management of trading relations in MessageGate
- Management of trading relations in central EDI function (if activated)
- Management of SMTP Filter
- Download of data for example client certificate for the access to WebConfig or WebDAV or Web Service or for the use of S/MIME content, parameter or user files
- View or download Status reports or configure automatically generated Status reports
- Management of Email addresses to receive technical information



BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Login information (1)

... **T** ... Erleben, was verbindet. 

- WebConfig Management
- Certificate Management
- EDI Relation
- MessageGate Relation
- SMTP Filter
- Service BusinessMail X.400
- Logout

BusinessMail X.400 :: [WebConfig](#) mgatetester (49640)

The certificate of your application EMAILADDRESS=49640@testag.mgate.viat-test.de, CN=User-ID 049640, CN="/g=mgate/s=tester/cn=mgate tester/o=testag/p=MGATE/a=VIAT-TEST/c=DE", OU=viat.de, O=dttag, C=de is valid until **18.08.2018** (969 day/s left)

News 📢

Attention !!! New root certificate !!! Since 02.02.2015 is not possible to use client certificates created before 07th of May 2014. We had replaced the WebConfig CA (Root) certificate with a new certificate (WebConfig CA2) generated with an SHA256 signature and a key length of 4096 bit on Wednesday, the 07th of May 2014 at 10:00 AM CEST. Please import the application (i.e. Browser). You will find the new certificate on our Service-viat website.

In Overrun directory you will see information of messages not delivered to your EDIBOX because of syntax error or invalid relations entries (is not available for MessageGate and AS2).

You may request Status reports in GUI of WebConfig (view or download CSV files) or configure automatically delivery of reports to file interface based on defined schedule.

- When login into WebConfig you will find some information about new features or changes in the GUI.
- You may select one of the flags to change the language of the GUI.
- If you use https (WebDAV or Web Service) to access the File Interface or use S/MIME content, you will see the lifetime of the used certificates.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Login information (2)

...  Erleben, was verbindet.



- WebConfig Management
- Certificate Management
- EDI Relation
- MessageGate Relation
- SMTP Filter
- Service BusinessMail X.400
- Logout

BusinessMail X.400 :: [WebConfig](#) mgatetester (49640)

Your WebConfig certificate is valid until **18.08.2018** (969 day/s left)

The certificate of your application EMAILADDRESS=49640@testag.mgate.viat-test.de, CN=User-ID 049640, CN="/g=mgate/s=tester/cn=mgate tester/o=testag/p=MGATE/a=VIAT-TEST/c=DE", OU=viat.de, O=dttag, C=de is valid until **18.08.2018** (969 day/s left)

News

Attention !!! New root certificate !!! Since 02.02.2015 is not possible to use client certificates created before 07th of May 2014. We had replaced the WebConfig CA (Root) certificate with a new certificate (WebConfig CA2) generated with an SHA256 signature and a key length of 4096 bit on Wednesday, the 07th of May 2014 at 10:00 AM CEST. Please import the application (i.e. Browser). You will find the new certificate on our Service-viat website.

In Overrun directory you will see information of messages not delivered to your EDIBOX because of syntax error or invalid relations entries (is not available for MessageGate and AS2).

You may request Status reports in GUI of WebConfig (view or download CSV files) or configure automatically delivery of reports to file interface based on defined schedule.

- If you use a personalized certificate when log into WebConfig, you will see an information, how long this certificate is valid.
- If you had logged in via personalized certificate and log out, you have not to enter a value only press "Login" button to log in again.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Overview

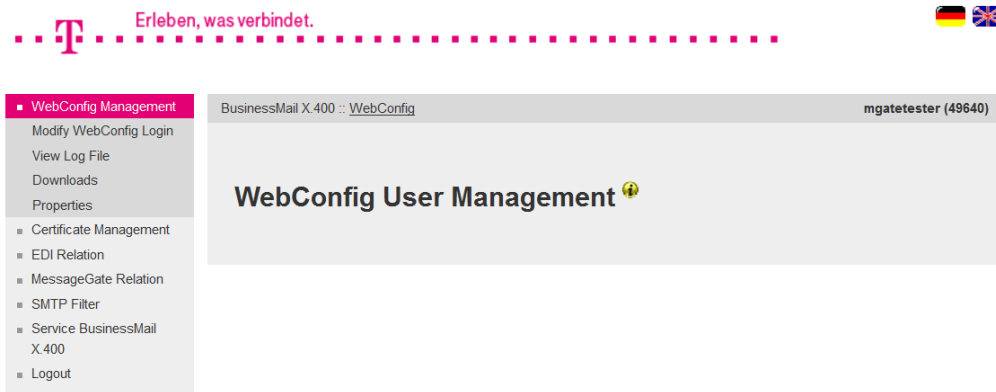

Management of WebConfig account

- Modify Login data
- View Log file
- Download data (certificates, parameter or user files)
- Properties: Language, time zone and separator of CSV files, life time of cookies



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Modify Login (1)


The screenshot shows the BusinessMail X.400 WebConfig Management interface. At the top, there is a header with the T-Mobile logo and the slogan "Erleben, was verbindet." followed by German and Australian flags. The left sidebar contains a menu with the following items: WebConfig Management, **Modify WebConfig Login** (highlighted), View Log File, Downloads, Properties, Certificate Management, EDI Relation, MessageGate Relation, SMTP Filter, Service BusinessMail X.400, and Logout. The main content area is titled "BusinessMail X.400 :: WebConfig" and "mgatetester (49640)". The main heading is "WebConfig Management :: Modify Login Data" with a help icon. Below this, there is a checkbox labeled "Authenticate user automatically". A green box titled "Authenticate user automatically" contains the text: "It will be possible to automatically authenticate user via client certificate. Please download the certificate/key and import it into web browser. You have to use this key whenever you want to log into your WebConfig account. If you would like to use login via username/ password you have to contact the BusinessMail X.400 Helpdesk." Below this, it says "Find the necessary certificate in [Download area](#)". There is also a "Modify Password" section with a help icon, containing three input fields: "Old Password", "New Password", and "Repeat Password". At the bottom, there are "Ok" and "Cancel" buttons.

- In this menu item you may enable the login via personalized certificate (Authenticate user automatically) or change the password of your WebConfig account. The password length should be at minimum 12 digits while using letters, numbers and special characters.
- Only the central administration can change the WebConfig Logon name. Please contact the Helpdesk, if you have such a request.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Modify Login (2)

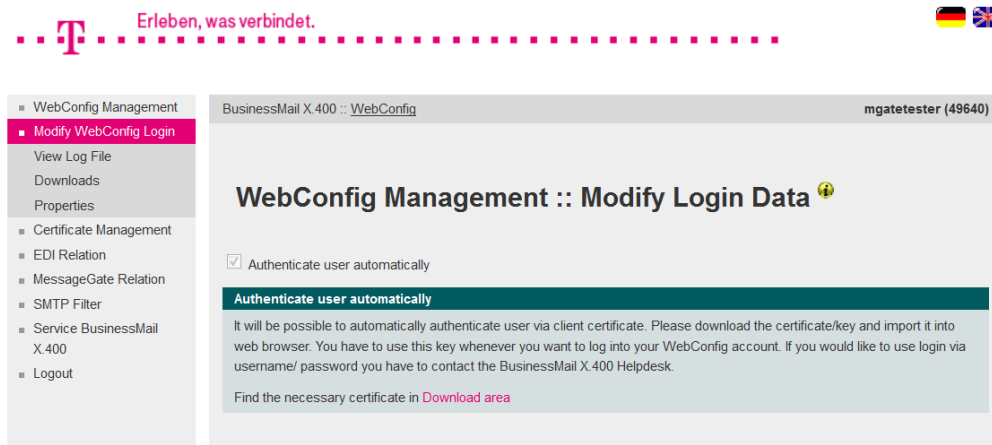

- If you enable “Authenticate user automatically”, you will get the information, that you need a personalized certificate. If you did not download and install this certificate you should not continue.
- If the feature “Authenticate user automatically” is enabled, only the Helpdesk can disable this feature or remove compromised certificates.
- The Helpdesk will also reenable your WebConfig account, if it is temporary locked because of login failures.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – View Log File

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

WebConfig Management :: View Log File

Filter:

14.01.2014 08:45:29 mgatetester: updated: Automatically generated Status Report
14.01.2014 08:45:33 mgatetester: Automatically generated Status Report disabled
14.01.2014 08:45:49 mgatetester: Filter Status modified: SMTP Originator "disabled"
14.01.2014 08:45:54 mgatetester: Filter Status modified: SMTP Originator "enabled"
14.01.2014 08:45:58 mgatetester: Filter Status modified: SMTP Originator "partly disabled"
14.01.2014 08:50:36 mgatetester: New EDI Account created: test
14.01.2014 08:50:47 mgatetester: EDI Account deleted: test
14.01.2014 08:51:25 mgatetester: New EDI Relation created: MGATEST_0001:65-test
14.01.2014 08:51:35 mgatetester: EDI Relation deleted: MGATEST_0001:65::test

- In Log file you will see all activities in relation/filter management. Each entry shows a time stamp, the name of initiator and the relation.
- While entering a search string (Filter) you may reduce the number of displayed entries.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Downloads (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

WebConfig Management :: Downloads

WebConfig client certificate is used to automatically authenticate user

Certificates in "compatibility mode" ☐ Define the export password

Create and download

The following Certificate files are ready for download

	MIME Type
zertifikat.zip	application/zip

The following user data is ready for download

	MIME Type
X400Adresse.csv	application/csv
EDI.csv	application/csv
EDI_TP.csv	application/csv
MessageGate.csv	application/csv
MessageGate_PS.csv	application/csv
SMTPFilter.csv	application/csv

The following Status Report is ready for download

	MIME Type
StatusReport.csv	application/csv

- In this menu item you have the possibility to download different types of files.
- Create an PKCS#12 archive (*.p12) including a client certificate and a private key to log into WebConfig with personalized certificate (automatically authenticate user, certificate is only valid for your User-ID). You may create and download more than one certificate. But if one of those certificates has been compromised, the Helpdesk must revoke all certificates.






ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Downloads (2)

 Erleben, was verbindet.



- WebConfig Management
 - Modify WebConfig Login
 - View Log File
 - Downloads**
 - Properties
- Certificate Management
- EDI Relation
- MessageGate Relation
- SMTP Filter
- Service BusinessMail X.400
- Logout

BusinessMail X.400 :: WebConfigmgatetester (49640)

WebConfig Management :: Downloads

WebConfig client certificate is used to automatically authenticate user

Certificates in "compatibility mode" ☐

Define the export password

Create and download

The following Certificate files are ready for download

	MIME Type
zertifikat.zip	application/zip

The following user data is ready for download

	MIME Type
X400Adresse.csv	application/csv
EDI.csv	application/csv
EDI_TP.csv	application/csv
MessageGate.csv	application/csv
MessageGate_PS.csv	application/csv
SMTPFilter.csv	application/csv

The following Status Report is ready for download

	MIME Type
StatusReport.csv	application/csv

- To create and download the client certificate and private key, it is necessary to enter an export password that has a minimum length of 12 digits and include at minimum one letter, one number and one special character. We recommend to use a password that is as irregular and long as possible.
- The PKCS#12 archive file will be encrypted using AES by default. When using very old browsers or Webservice modules you may enable the option and use a compatibility mode (RC4) to create the archive.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Downloads (3)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

WebConfig Management :: Downloads

WebConfig client certificate is used to automatically authenticate user

Certificates in "compatibility mode" ☐ Define the export password

Create and download

The following Certificate files are ready for download

	MIME Type
zertifikat.zip	application/zip

The following user data is ready for download

	MIME Type
X400Adresse.csv	application/csv
EDI.csv	application/csv
EDI_TP.csv	application/csv
MessageGate.csv	application/csv
MessageGate_PS.csv	application/csv
SMTPFilter.csv	application/csv

The following Status Report is ready for download

	MIME Type
StatusReport.csv	application/csv

- You will see the menu item regarding certificate files only if a client certificate (https for WebDAV/ Web Service) will be provided for your account.
- To import the configuration (properties and trading relations) into your application you may download the parameter files (CSV format).



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Downloads (4)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

WebConfig Management :: Downloads

WebConfig client certificate is used to automatically authenticate user

Certificates in "compatibility mode" ☐

Define the export password

Create and download

The following Certificate files are ready for download

	MIME Type
zertifikat.zip	application/zip

The following user data is ready for download

	MIME Type
X400Adresse.csv	application/csv
EDI.csv	application/csv
EDL_TP.csv	application/csv
MessageGate.csv	application/csv
MessageGate_PS.csv	application/csv
SMTPFilter.csv	application/csv

The following user files are ready for download

	Mark for deletion
Testfile_49640.txt	<input type="checkbox"/>

Delete

- Only if there are user files ready for download you will see the menu item with the list of those files. After downloading a file, you may mark the entry and press “Delete” to delete it on host side and remove the entry.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

WebConfig Management – Properties

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

WebConfig Management :: Properties

Select file type of downloadable CSV File

Time zone: GMT (UTC+0:00)

List separator: ; (continental)

Common properties

Language: English

Certificates in "compatibility mode": ☐

Maximum life time of cookie: 30 Days


Store properties Delete all stored properties

- Format of CSV file (Time zone, separator)
- Language of GUI
- Default value for the compatibility mode while creating certificates
- Lifetime of cookies

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Certificate Management

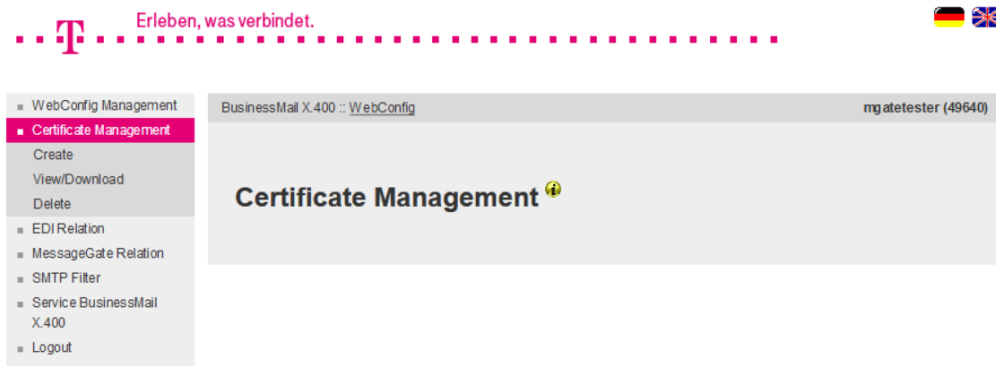


- In this main menu you may manage the certificates used for https (WebDAV or Web Service) access and other security features like S/MIME (Create, View/Download, Delete).

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Certificate Management – Create new certificate (1)

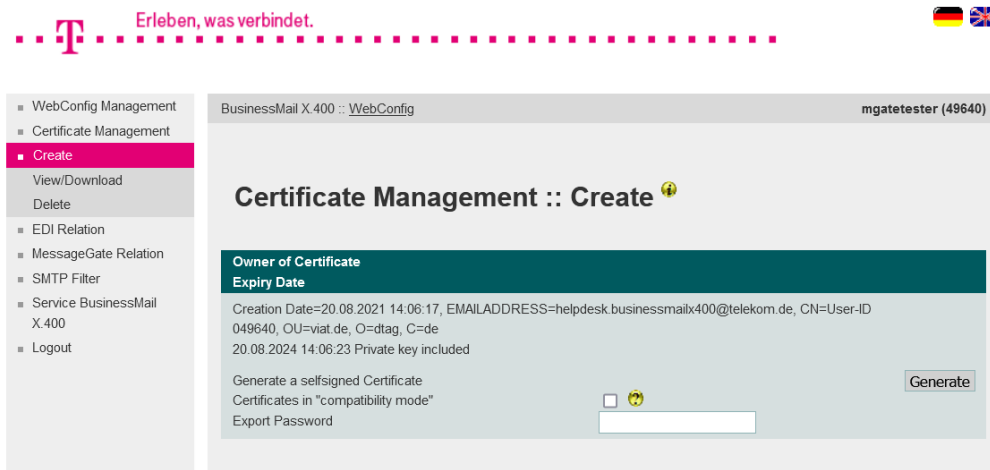

- In this menu item you may create up to two certificates with a private key used for S/MIME content (sign and/or encrypt it) or for the https (WebDAV or Web Service) access and store them into the database.
- The WebDAV certificates will be automatically activated on the Proxy Server the next day. If you need an earlier access, please ask the administration to manually update the server.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Certificate Management – Create new certificate (2)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

Certificate Management :: Create

Owner of Certificate
Expiry Date

Creation Date=20.08.2021 14:06:17, EMAILADDRESS=helpdesk.businessmailx400@telekom.de, CN=User-ID
049640, OU=viat.de, O=dttag, C=de
20.08.2024 14:06:23 Private key included


☐ Generate a selfsigned Certificate
Certificates in "compatibility mode"
Export Password

- If you create a new certificate with private key, you must enter an export password that has a minimum length of 12 digits and include at minimum one letter, one number and one special character. We recommend to use a password that is as irregular and long as possible to secure the PKCS#12 archive file (including private key).

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Certificate Management – Create new certificate (3)


... T ... Erleben, was verbindet. 

- WebConfig Management
- Certificate Management
- **Create**
- View/Download
- Delete
- EDI Relation
- MessageGate Relation
- SMTP Filter
- Service BusinessMail X.400
- Logout

BusinessMail X.400 :: WebConfig mgatetester (49640)

Certificate Management :: Create

Owner of Certificate
Creation Date=20.08.2021 14:06:17, EMAILADDRESS=helpdesk.businessmailx400@telekom.de, CN=User-ID 049640, OU=viat.de, O=dttag, C=de
20.08.2024 14:06:23 Private key included

Generate a selfsigned Certificate ☐ 

Certificates in "compatibility mode"

Export Password

- The PKCS#12 archive file will be encrypted using AES by default. When using very old WebDAV or Web Service modules you may choose compatibility mode (RC4) to create the archive while enabling this option.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Certificate Management – View/Download Certificates




- In this menu item you may view (View) the certificates stored in the database (used for S/MIME content or for the https WebDAV or Web Service access to the File Interface directory) to analyze them or download (Download) the PKCS#12 archive files (*.p12) including the private key and import it into your application.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Certificate Management – Delete existing certificate

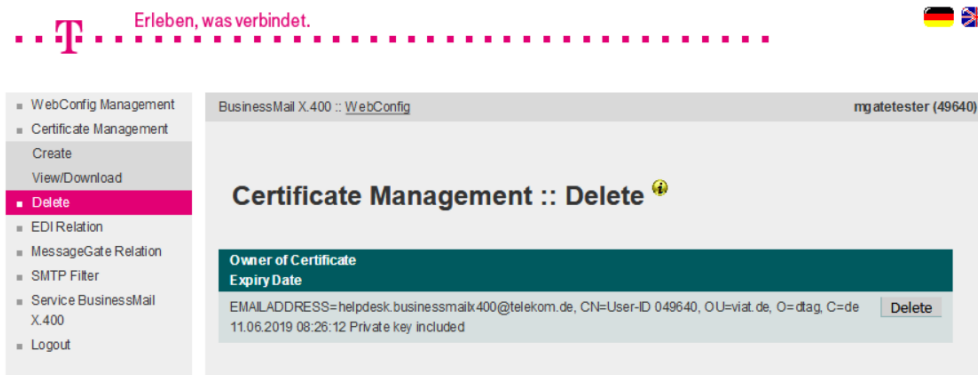

- In this menu item you may delete certificates stored in database.
- You must confirm to delete this filter rule.
- There will be no auto delete of expired certificates.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation (only if central EDI functionality has been enabled)



- In this main menu item, you may manage (create, show/modify or delete) your own EDI accounts and your EDI relations, if central EDI functionality has been enabled for your MessageGate account.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Create an EDI account

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

EDI Relation :: Create EDI Account

EDI Account

EDI ID

EDI Qualifier

Closed User Group ☐ (only configured partner were able to send messages to this EDI Account)

Ok Cancel

- In this menu item you may configure an own EDI account. One own EDI account must be configured at minimum.
- It is mandatory to add a value to EDI ID (for example an ILN/GLN), but EDI Qualifier is an optional value.
- When enabling Closed User Group only a configured EDI Trading Partner will be able to deliver a document to this own EDI account.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – List and select an EDI account

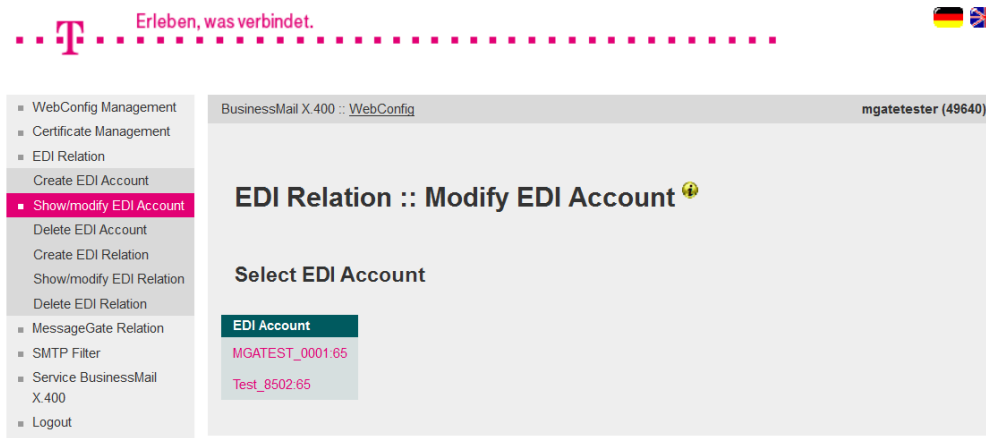

- In this menu item you will see all configured EDI accounts.
- Select an EDI account via double click of mouse to modify the values.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Modify an EDI account

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

EDI Relation :: Modify EDI Account

EDI Account

EDI ID	MGATEST_0001
EDI Qualifier	65
Closed User Group	<input checked="" type="checkbox"/> (only configured partner were able to send messages to this EDI Account)
Created	05.03.2008 10:27:38
Modified	05.03.2008 10:27:38

Notice: When changing EDI Account all related relations will be updated.

Ok Cancel

- In this menu item you may change the values of configured EDI accounts.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Delete an EDI account

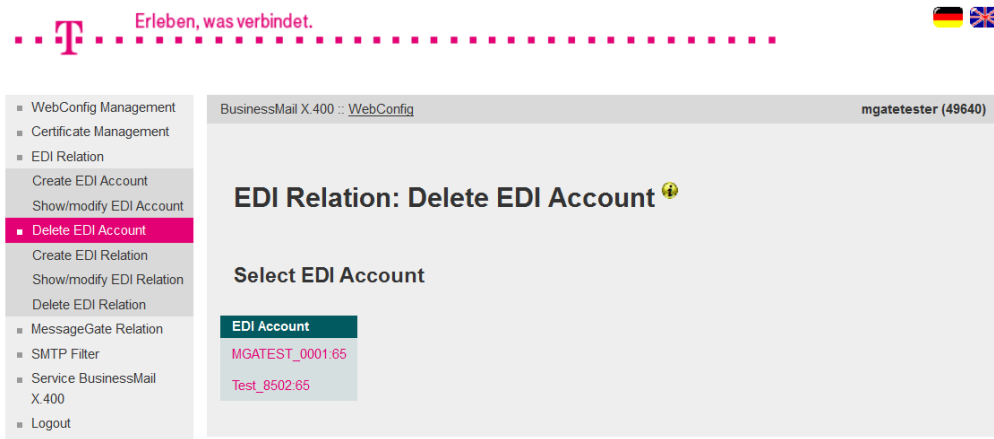



- In this menu item you may delete a configured EDI account.
- Select an EDI account via double click of mouse.
- You must confirm to delete this EDI account.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Create a new Relation (1)


...  ... Erleben, was verbindet. 


- WebConfig Management
- Certificate Management
- EDI Relation
 - Create EDI Account
 - Show/modify EDI Account
 - Delete EDI Account
 - Create EDI Relation
 - Show/modify EDI Relation
 - Delete EDI Relation
- MessageGate Relation
- SMTP Filter
- Service BusinessMail X.400
- Logout


BusinessMail X.400 :: WebConfig mgatetester (49640)

EDI Relation :: Create new Relation

X.400 Partner

User Identification 
User ID

X.400 Address 

general 

SMTP Address

Country (c) ADMD (a) PRMD (p)

X.121 (x121)

UA ID (n-id)

Commonname (cn)

Given name (g) Surname (s)

Generation (q) Initials (i)

Organization (o)

Org Unit 1 (ou1) Org Unit 2 (ou2)

- In this menu item you may configure a new EDI Trading Partner/ EDI Relation.
- In section „X.400 Partner“ you must add the User ID or the X.400 address of your partner. When entering the address of external Partners, you may use special address masks (for example SMTP partner). If you enter a value to “User ID” you are not able to enter X.400 address elements.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Create a new Relation (2)

Org Unit 1 (ou1) Org Unit 2 (ou2)
Org Unit 3 (ou3) Org Unit 4 (ou4)

Domain defined Attributes (dda)

Type Value
Type Value
Type Value
Type Value

EDI Properties

EDI Relation ⓘ

EDI Account

Partner EDI ID

Partner EDI Qualifier

EDI Testflag ☐

X.400 Content Type

Bodypart

Comment

- In section „EDI properties“ you must map this relation to configured EDI account.
- The partner's EDI ID is mandatory when configuring a relation. Optional is to add an EDI Qualifier or to select EDI Test flag (Test flag in UNB will be used for the lookup of the X.400 address).
- The parameters X.400 Content Type and Bodypart will define the format of X.400 message send to your partner.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Create a new Relation (3)

The screenshot displays the 'EDI Relation' form in the BusinessMail X.400 Web Interface MessageGate. The form is divided into several sections:

- Org Unit Fields:** Four input fields labeled 'Org Unit 1 (ou1)', 'Org Unit 2 (ou2)', 'Org Unit 3 (ou3)', and 'Org Unit 4 (ou4)'.
- Domain defined Attributes (dda):** A section with four rows, each containing a 'Type' and a 'Value' input field.
- EDI Properties:** A section with a dark green header 'EDI Relation' and a yellow warning icon. It contains the following fields:
 - EDI Account:** A dropdown menu showing 'MGATEST_0001:65'.
 - Partner EDI ID:** An input field.
 - Partner EDI Qualifier:** An input field.
 - EDI Testflag:** A checkbox.
 - X.400 Content Type:** A dropdown menu with options 'IPM84', 'IPM88', and 'EDI'.
 - Bodypart:** A dropdown menu with options 'IA5 Text', 'Bilateral (Bodypart 14)', and 'ISO Latin 1'.
 - Comment:** A text area.
- Buttons:** 'Ok' and 'Cancel' buttons at the bottom.

- You may add a comment with a maximum length of 64 characters to this relation entry. The content of this comment will be used by filter mechanism within select relation menu (modify, delete).

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Select and modify a Relation

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

EDI Relation :: Modify Relation

Select Relation

Filter:

EDI Account	Partner EDI Account	Test flag	X.400 Address
MGATEST_0001.65	14300019876.14	<input type="checkbox"/>	g=invoice; s=rechnungswesen; o=Elbemetall; p=EDICC; a=VIAT; c=DE
MGATEST_0001.65	143000255.14	<input type="checkbox"/>	g=edi; s=Holzhausen; o=Holzhausen; p=EDICC; a=VIAT; c=DE
MGATEST_0001.65	1490001002.14	<input type="checkbox"/>	g=mail; s=edicc; dda.rfc-822=mail.edicc(a)loosen.net; a=VIAT-SMTP; c=DE

- In this menu item you will see all EDI relations configured for your EDI accounts.
- When entering a search string you will reduce the number of displayed entries. The search mechanism will also consider the comments added to the relation entries.
- Select an EDI relation via double click of mouse to modify the values.





ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Modify a Relation (1)

...  ... Erleben, was verbindet. 

- WebConfig Management
- Certificate Management
- EDI Relation
 - Create EDI Account
 - Show/modify EDI Account
 - Delete EDI Account
 - Create EDI Relation
 - Show/modify EDI Relation
 - Delete EDI Relation
- MessageGate Relation
- SMTP Filter
- Service BusinessMail X.400
- Logout

BusinessMail X.400 :: WebConfig mgatetester (49640)

EDI Relation :: Modify Relation

Create copy

X.400 Partner

User Identification

User ID 49662

X.400 Address

Country (c)	DE	ADMD (a)	VIAT	PRMD (p)	EDICC
X.121	(x121)				
UA ID	(n-id)				
Commonname	(cn)				
Given name	(g)	invoice	Surname	(s)	rechnungswesen
Generation	(q)		Initials	(i)	
Organization	(o)	Elbemetall			
Org Unit 1	(ou1)		Org Unit 2	(ou2)	
Org Unit 3	(ou3)		Org Unit 4	(ou4)	

- In this menu item you may modify the values of selected EDI relation (X.400 address or EDI parameter).
- You may use the values of this relation to create a new relation, while selecting “Create copy” (for example to map the relation to another own EDI account).



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Modify a Relation (2)

The screenshot displays the 'BusinessMail X.400 :: WebConfig' interface for user 'mgatetester (49640)'. The left sidebar contains a menu with options like 'WebConfig Management', 'Certificate Management', 'EDI Relation', and 'Show/modify EDI Relation' (which is highlighted). The main content area is titled 'EDI Relation :: Modify Relation' and includes a 'Create copy' button. Below this, the 'X.400 Partner' section is visible, followed by 'User Identification' (showing User ID 49663) and the 'X.400 Address' section. The 'X.400 Address' section contains various input fields for Country (c), ADMID (a), PRMD (p), X.121, UA ID, Commonname (cn), Given name (g), Surname (s), Generation (q), Initials (i), Organization (o), Org Unit 1-4, and Domain defined Attributes (dda). The 'Domain defined Attributes (dda)' section shows 'Type' as 'rfc-822' and 'Value' as 'mail.edicc(a)loosen.net'.

- EDI Trading Partner, who is not using X.400 service → SMTP Gateway.
- While changing the SMTP address in DDA value (please use “(a)” instead of “@”) you must change in parallel the value of the Surname and if used, also that of Given name.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

EDI Relation – Delete a Relation

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

EDI Relation :: Delete Relation

Select Relation

Filter:

EDI Account	Partner EDI Account	Test flag	X.400 Address
MGATEST_0001.65	14300019876.14	<input type="checkbox"/>	g=invoice; s=rechnungswesen; o=Elbemetall; p=EDICC; a=VIAT; c=DE
MGATEST_0001.65	143000255.14	<input type="checkbox"/>	g=edi; s=Holzhausen; o=Holzhausen; p=EDICC; a=VIAT; c=DE
MGATEST_0001.65	1490001002.14	<input type="checkbox"/>	g=mail; s=edicc; dda.rfc-822=mail.edicc(a)loosen.net; a=VIAT-SMTP; c=DE

- In this menu item you may delete a configured EDI relation.
- Select an EDI relation via double click of mouse to delete this entry.
- You must confirm to delete this EDI relation.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation



- In this main menu item, you may manage all database entries related to your MessageGate account.
- Configuration items are:
MessageGate properties, create, view/modify and delete the MessageGate relations, view and download Status reports and configure automatically generated Status reports.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Properties (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Properties

User

X.400 Address cn=mgate tester; g=mgate; s=tester; o=testag; n-id=2049640; p=MGATE; a=VIAT-TEST; c=DE

Properties

When sending X.400 Messages map a requested Notification into **Delivery Notification (DN)**

Receipt Notification requested in X.400 messages should be ☐ ignored ☒ send, if client had sent notification

Message Expiration **1440** Minutes

X.400 Content Type **IPM84** **IPM88**

Bodypart **IA5 Text** **Bilateral (Bodypart 14)** **ISO Latin 1** **Depends on context (variable)**

Encode binary data **binary** **base64**

Format of Output **SMTP** **TS (TransmissionSet)**

Purge time **240** Hours

Comment

- In this menu item you may configure the properties of your MessageGate account.
- You must define the X.400 report that should be requested in the X.400 message if you requested a report in the message header
 - Non-Delivery Notification (NDN)
 - Information in case of an error,
 - Delivery Notification (DN)
 - Message was delivered,
 - Receipt Notification (RN)
 - Message was processed.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Properties (2)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Properties

User

X.400 Address cn=mgate tester; g=mgate; s=tester; o=testag; n-id=2049640; p=MGATE; a=VAT-TEST; c=DE

Properties

When sending X.400 Messages map a requested Notification into **Delivery Notification (DN)**

Receipt Notification requested in X.400 messages should be ☐ ignored ☒ send, if client had sent notification

Message Expiration **1440** Minutes

X.400 Content Type **IPM84** **IPM88**

Bodypart **IA5 Text** **Bilateral (Bodypart 14)** **ISO Latin 1** **Depends on context (variable)**

Encode binary data **binary** **base64**

Format of Output **SMTP** **TS (TransmissionSet)**

Purge time **240** Hours

Comment

- You may also configure whether a receipt report requested in a message send by your partner should be mapped to the mail file the MessageGate process will deliver to the file interface or not.
- The following items are relevant while mapping MIME to X.400 and vice versa:
 - Message expiration (→ NDN),
 - X.400 message type,
 - Mapping MIME to X.400,
 - Encoding of binary data delivered to file interface (Base64 or Binary).



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Properties (3)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Properties

User

X.400 Address cn=mgate tester; g=mgate; s=tester; o=testag; n-id=2049640; p=MGATE; a=VAT-TEST; c=DE

Properties

When sending X.400 Messages map a requested Notification into **Delivery Notification (DN)**

Receipt Notification requested in X.400 messages should be ☐ ignored ☒ send, if client had sent notification

Message Expiration **1440** Minutes

X.400 Content Type **IPM84** **IPM88**

Bodypart **IA5 Text** **Bilateral (Bodypart 14)** **ISO Latin 1** **Depends on context (variable)**

Encode binary data **binary** **base64**

Format of Output **SMTP** **TS (TransmissionSet)**

Purge time **240** Hours

Comment

- If central EDI function has been enabled, you may configure whether an EDIFACT document should be delivered within a Transmission set file or a mail file.
- The “Purge time” of entries in database (Trace_Tab) will be set by default to 240 hours (10 days). If you need another value, please contact the Helpdesk.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Create a new Relation (1)


...T... Erleben, was verbindet. 


- WebConfig Management
- Certificate Management
- EDI Relation
- MessageGate Relation
- Properties
- Create Relation**
- Show/modify Relation
- Delete Relation
- Status Report
- Autom. Status Report
- SMTP Filter
- Service BusinessMail X.400
- Logout


BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Create new Relation

X.400 Partner

User Identification 
User ID

X.400 Address 

general 

SMTP Address

Country (c) ADMD (a) PRMD (p)

X.121 (x121)

UA ID (n-id)

Commonname (cn)

Given name (g) Surname (s)

Generation (q) Initials (i)

Organization (o)

Org Unit 1 (ou1) Org Unit 2 (ou2)

Org Unit 3 (ou3) Org Unit 4 (ou4)

- In this menu item you may configure a new MessageGate relation.
- In the section “X.400 Partner” you must add the User ID or the X.400 address of your partner. When entering the address of external partners, you may use special address masks (for example SMTP partner). If you enter a value to “User ID” you are not able to enter X.400 address elements.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Create a new Relation (2)

The screenshot displays the 'X.400 Properties' dialog box in the MessageGate web interface. The dialog is divided into two main sections: 'Domain defined Attributes (dda)' and 'X.400 Properties'.

Domain defined Attributes (dda): This section contains four rows, each with a 'Type' and a 'Value' input field.

X.400 Properties: This section contains several configuration options:

- When sending X.400 Messages map a requested Notification into:** A dropdown menu currently set to 'Delivery Notification (DN)'.
- Receipt Notification requested in X.400 messages should be:** Two radio buttons: 'ignored' (unselected) and 'send, if client had sent notification' (selected).
- Message Expiration:** A text input field set to '1440' with a 'Minutes' label.
- X.400 Content Type:** A dropdown menu currently set to 'IPM84'.
- Bodypart:** A dropdown menu with options: 'IA5 Text', 'Bilateral (Bodypart 14)', 'ISO Latin 1', and 'Depends on context (variable)' (highlighted).
- Encode binary data:** A dropdown menu with options: 'binary' (highlighted) and 'base64'.
- Comment:** A text input field.

At the bottom of the dialog are 'Ok' and 'Cancel' buttons.

- In X.400 Properties you may configure for this relation the type of requested X.400 report, to map a request RN, the type of X.400 message and how to deliver binary data. MessageGate will use this values instead of those defined in MessageGate properties.
- You may add a comment with a maximum length of 64 characters to this relation entry. The content of this comment will be used by filter mechanism within select relation menu (modify, delete).

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – List existing Relations

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Modify Relation

Select Relation

Filter:

User ID	X.400 Partner
49664	s=wareneingang; o=Helfricht; p=EDICC; a=VIAT; c=DE
49665	s=Krumm; dda.rfc-822=krumm(a)tools.de; a=VIAT-SMTP; c=DE

- In this menu item you will see all relations configured for your MessageGate account.
- While entering a search string you may reduce the number of displayed entries. The search mechanism will also consider the comments added to the relation entries.
- Select a MessageGate relation via double click of mouse to modify the values.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Modify Relation

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Modify Relation

X.400 Partner

User Identification

User ID 49665

X.400 Address

Country (c)	DE	ADMD (a)	VIAT-SMTP	PRMD (p)	
X.121	(x121)				
UA ID	(n-id)				
Commonname	(cn)				
Given name	(g)		Surname	(s)	Krumm
Generation	(q)		Initials	(i)	
Organization	(o)				
Org Unit 1	(ou1)		Org Unit 2	(ou2)	
Org Unit 3	(ou3)		Org Unit 4	(ou4)	

Domain defined Attributes (dda)

Type	rfc-822	Value	krumm(a)tools.de
------	---------	-------	------------------

- In this menu item you may modify the values of configured relation (X.400 address and X.400 properties). When changing external address (for example SMTP address) you must update all values (see also Modify EDI Relation).



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Delete Relation

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Delete Relation

Select Relation

Filter:

User ID	X.400 Partner
49664	s=wareneingang; o=Helfricht; p=EDICC; a=VIAT; c=DE
49665	s=Krumm; dda.rfc-822=krumm(a)tools.de; a=VIAT-SMTP; c=DE

- In this menu item you may delete a configured MessageGate relation.
- Select a relation via double click of mouse to delete this entry.
- You must confirm to delete this MessageGate relation.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Status Report (1)

... T ... Erleben, was verbindet. 


- WebConfig Management
- Certificate Management
- EDI Relation
- MessageGate Relation
 - Properties
 - Create Relation
 - Show/modify Relation
 - Delete Relation
 - **Status Report**
 - Autom. Status Report
- SMTP Filter
- Service BusinessMail X.400
- Logout


BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Request Status Report

Records since (Format: DD-MMM-YYYY hh:mm:ss)

Only failed messages ☐



Filter: 

Status Report for UserID 49640; generated 14-Jan-2014 08:42:15
Disposition=All, Direction=Both, Format=History

From: "G=ipm;S=tester;O=testag;A=viaT-test;C=de" <49637@viaT.de>
Order-ID: 8D973VBK9GG001EH
Message-ID: 228 14/01/14
MTS-ID: 2B7E340311E37CF785D415A3
Received: 14-Jan-2014 08:37:58 +0100

From: "S=maurer;P=PMDF-TEST;A=VIAT-TEST;C=DE" <60626@viaT.de>
Order-ID: 9D973VBK9GG001EH
Message-ID: 52D4EA30.9020202
MTS-ID: B02BC07C11E37CF785D46AB9
Received: 14-Jan-2014 08:41:40 +0100

From: "G=ipm;S=tester;O=testag;A=viaT-test;C=de" <49637@viaT.de>
Order-ID: AD973VBK9GG001EH
Message-ID: 230 14/01/14
MTS-ID: C0548CE411E37CF785D432BB
Received: 14-Jan-2014 08:42:07 +0100

- In this menu item you may request status information of transactions (sending and receiving messages).
- You have the option to view this Status report directly in GUI. You may enter a date to reduce the number of displayed entries. Other options are to choose “Only failed messages” or to enter a search string. The Status report will always show sent and received message entries with format “History”.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Status Report (2)

Erleben, was verbindet. 

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Request Status Report

Records since (Format: DD-MMM-YYYY hh:mm:ss)

Only failed messages ☐

Filter:

Status Report for UserID 49640; generated 14-Jan-2014 08:42:15
Disposition=All, Direction=Both, Format=History

From: "G=ipm;S=tester;O=testag;A=viaT-test;C=de" <49637@viaT.de>
Order-ID: 8D973VBK9GG001EH
Message-ID: 228 14/01/14
MTS-ID: 2B7E340311E37CF785D415A3
Received: 14-Jan-2014 08:37:58 +0100

From: "S=maurer;P=PMDF-TEST;A=VIAT-TEST;C=DE" <60626@viaT.de>
Order-ID: 9D973VBK9GG001EH
Message-ID: 52D4EA30.9020202
MTS-ID: B02BC07C11E37CF785D46AB9
Received: 14-Jan-2014 08:41:40 +0100

From: "G=ipm;S=tester;O=testag;A=viaT-test;C=de" <49637@viaT.de>
Order-ID: AD973VBK9GG001EH
Message-ID: 230 14/01/14
MTS-ID: C0548CE411E37CF785D432BB
Received: 14-Jan-2014 08:42:07 +0100

- For messages delivered to File Interface there will be only one entry including Originator's address ("From:").
- Depending on number of recipients in message there will be an equivalent number of entries in Status report where the Order and Message ID will be identical. Only the recipient address will unambiguously identify the entry. You may use "To:", "Cc:" or "Bcc:" to address your partner.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Status Report (3)

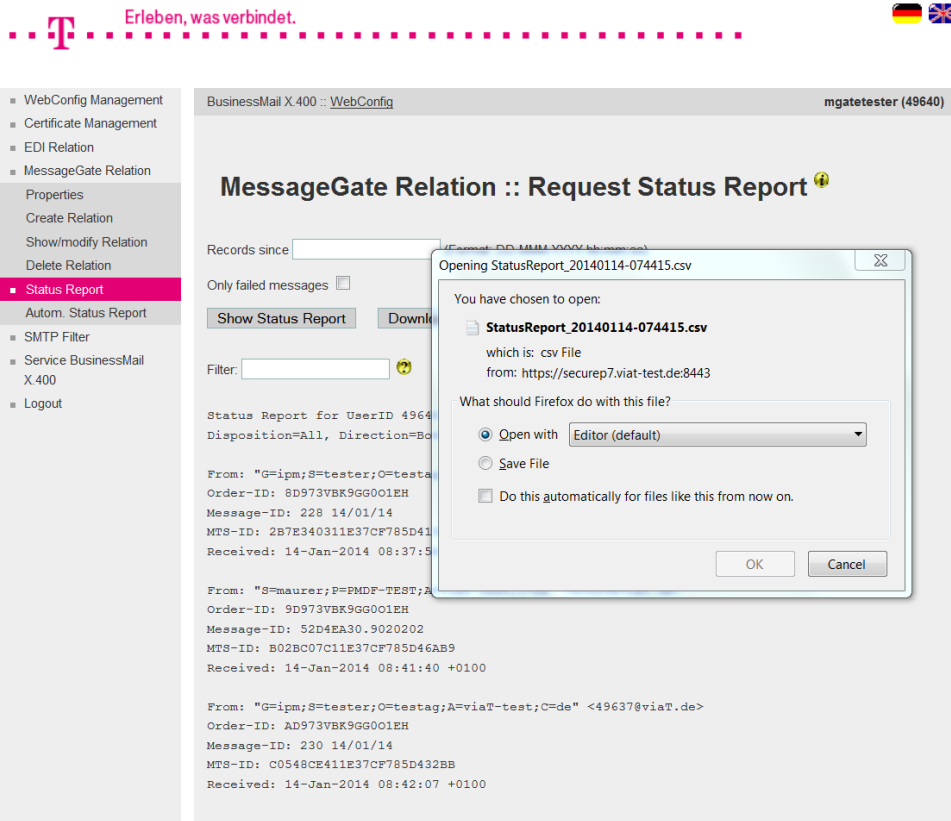

- If you want to download the Status report, you may add a date or choose the option “Only failed messages” to reduce the number of entries added to file. You may download the CSV file into your environment or open it directly. There will be entries for sent and received messages in Status report with format “History”.
- The address type (“To”, “Cc”, “Bcc”) will be defined in column “Rcpt Type”.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Automatically generated Status Report (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Automatically generated Status Report

☒ Enable automatically generated Status Report

Properties

Prefix of file name:

Only failed messages: ☐

Days of the week:

- ☒ Monday
- ☒ Tuesday
- ☒ Wednesday
- ☒ Thursday
- ☒ Friday
- ☒ Saturday
- ☒ Sunday

Daily start date: (MET/MEST, Format: hh:mm)

Daily end date: (MET/MEST, Format: hh:mm)

Schedule: Minutes (0=Only one time at daily start date) 30

Disposition:

Direction:

Format:

Ok Cancel

- In this menu item you may configure that Status reports will be delivered automatically to file interface. You may assign a prefix for file name of Status report and configure the schedule (day of week, daily start and end date, schedule with minimum of 30 minutes), the criteria to select entries (only when status changed or all, only sent, only received or both directions) and the format of entries (Actual, History, CSV-C or CSV-S). Start the delivery while activating the option “Enable automatically generated Status Report”.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

MessageGate Relation – Automatically generated Status Report (2)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

MessageGate Relation :: Automatically generated Status Report

☒ Enable automatically generated Status Report

Properties

Prefix of file name:

Only failed messages: ☐

Days of the week:

- ☒ Monday
- ☒ Tuesday
- ☒ Wednesday
- ☒ Thursday
- ☒ Friday
- ☒ Saturday
- ☒ Sunday

Daily start date: (MET/MEST, Format: hh:mm)

Daily end date: (MET/MEST, Format: hh:mm)

Schedule: Minutes (0=Only one time at daily start date) 30

Disposition:

Direction:

Format:

Ok Cancel

- While enabling the option “Only failed messages” you may reduce the number of entries in the report.




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter

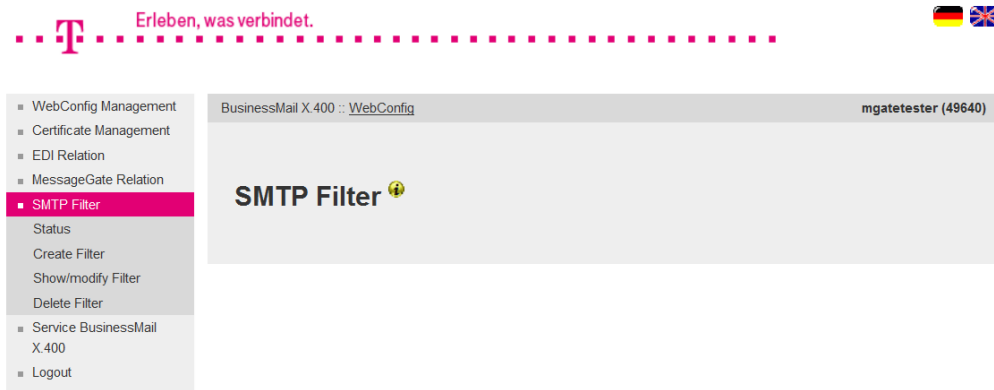

- In this main menu item, you have the option to define whether messages sent by Internet mail user will be delivered to your MessageGate account.
- If you do not have any Trading Partner using Internet mail, we recommend to set the status "Disabled".




ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter – Status

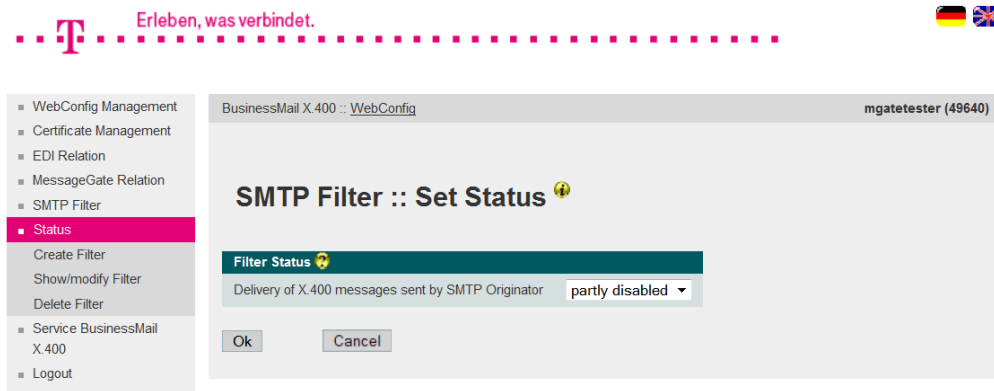


- You may configure, whether the delivery of Internet mail is:
 - enabled (deliver all)
 - partly disabled (allowed only for configured partners)
 - verify also the X.400 address in configured relation
RFC-822= x.x(a)x.x
 - disabled (do not deliver mails)

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter – Create Filter Rule

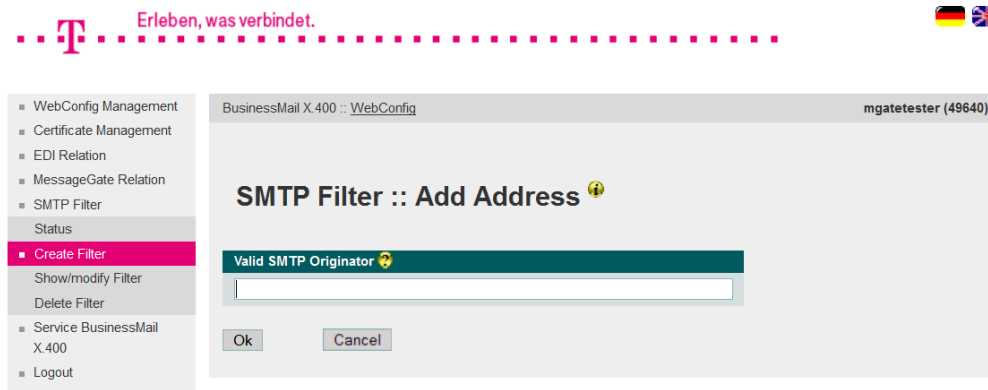


The screenshot shows the BusinessMail X.400 Web Interface. At the top, there is a header with the T-Mobile logo and the slogan "Erleben, was verbindet." followed by a dotted line. To the right of the header are the German and UK flags. Below the header is a left sidebar menu with the following items: WebConfig Management, Certificate Management, EDI Relation, MessageGate Relation, SMTP Filter, Status, Create Filter (highlighted in pink), Show/modify Filter, Delete Filter, Service BusinessMail X.400, and Logout. The main content area is titled "BusinessMail X.400 :: WebConfig" and shows the user "mgatetester (49640)". The main heading is "SMTP Filter :: Add Address" with a help icon. Below this is a section titled "Valid SMTP Originator" with a help icon and a text input field. At the bottom of the form are "Ok" and "Cancel" buttons.

- In this menu item you may configure a filter rule (SMTP address or part of it). The status must be set to “partly disabled” to enable this rule. Please use “@” in the complete SMTP address and not the “(a)” replacement used in the X.400 address!

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter – List Filter Rules (1)

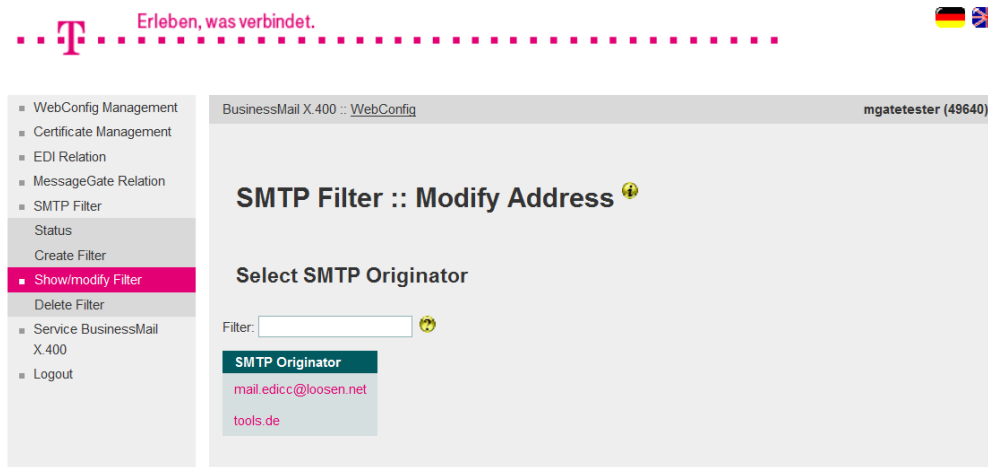

- In this menu item you will see all filter rules configured for your MessageGate account.
- While entering a search string, you may reduce the number of displayed entries.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter – List Filter Rules (2)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

SMTP Filter :: Modify Address ⚠

To modify SMTP address will have no influence at the moment because the filter is not set to "block partly". You may change this in Status menu.

Select SMTP Originator

Filter: ⚠

SMTP Originator

mail.edicc@loosen.net


tools.de

- If the status is not “partly disabled“, you will see an information that the rules will not be used.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter – Modify Filter Rule (1)

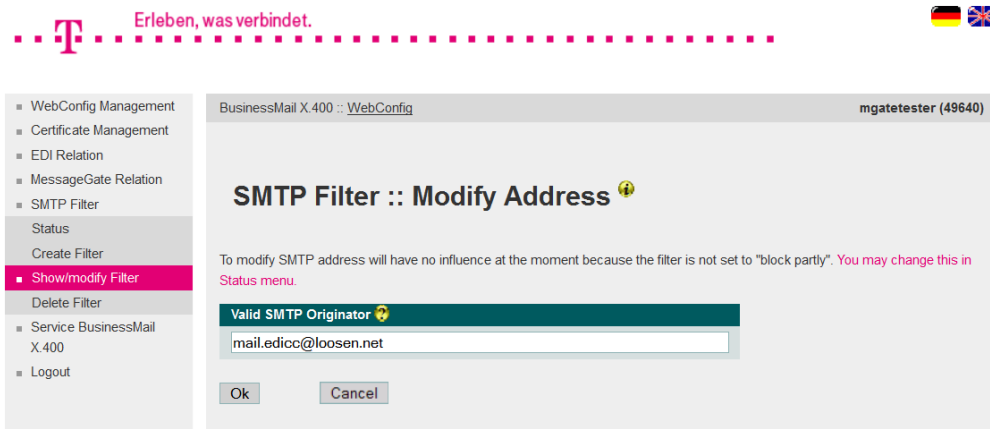


- In this menu item you have the possibility to modify a filter rule.
- This example shows the complete SMTP address of trading partner.
- The filter rule will not be use, because the status is not “partly disabled”.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter – Modify Filter Rule (2)

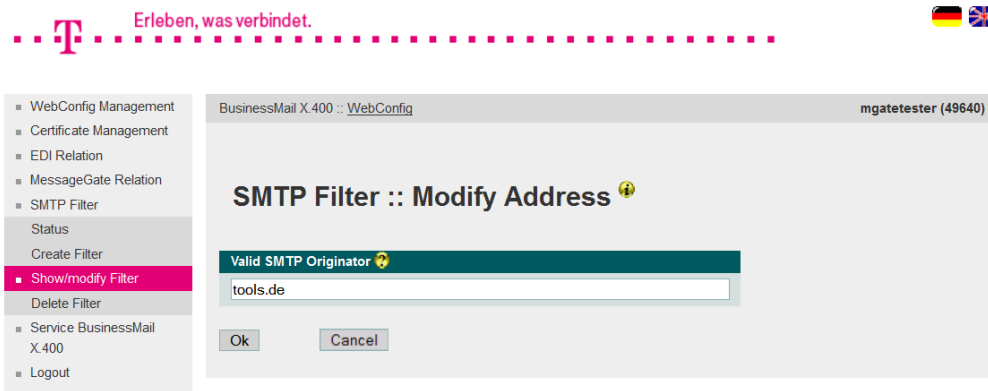


- This example shows only a partial address, so all users of this domain will be able to send mails to your MessageGate Account.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

SMTP Filter – Delete Filter Rule

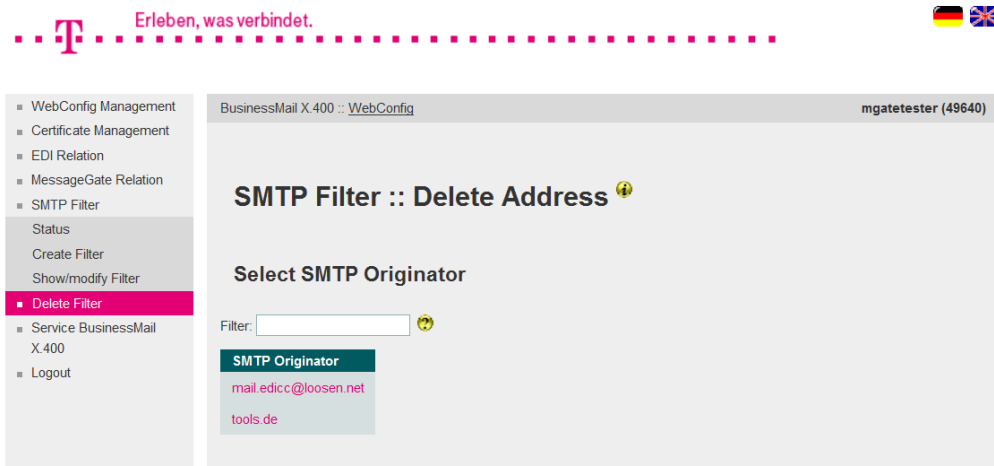


- In this menu item you may delete a configured filter rule.
- Select a filter rule via double click of mouse to delete this entry.
- You must confirm to delete this filter rule.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Service BusinessMail X.400

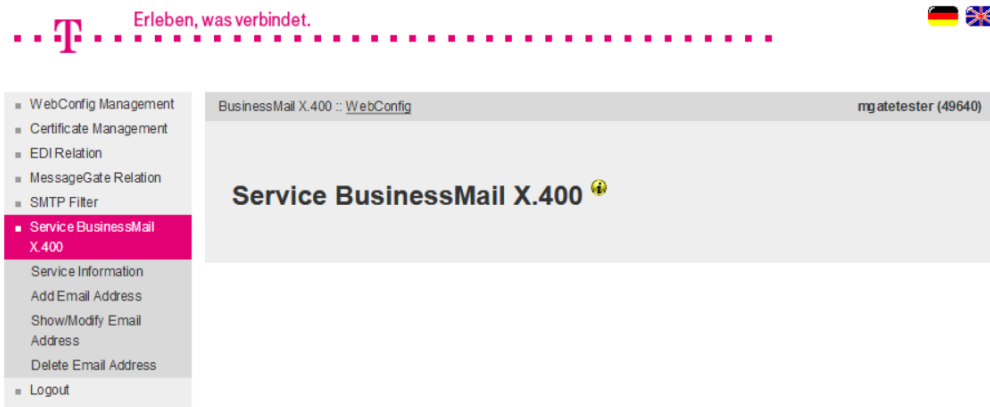

- In this main menu item, you will find information about the system status and other information about the BusinessMail X.400 service (Link to URL „<https://www.service-viat.de>“). You also have the possibility to manage Email addresses to receive technical information (Access Info, TecInfo, Trouble Info). Those Emails will contain current and important technical information about the BusinessMail X.400 service you should depending on type of Email provide to operation staff and/or to the person in charge of your application.






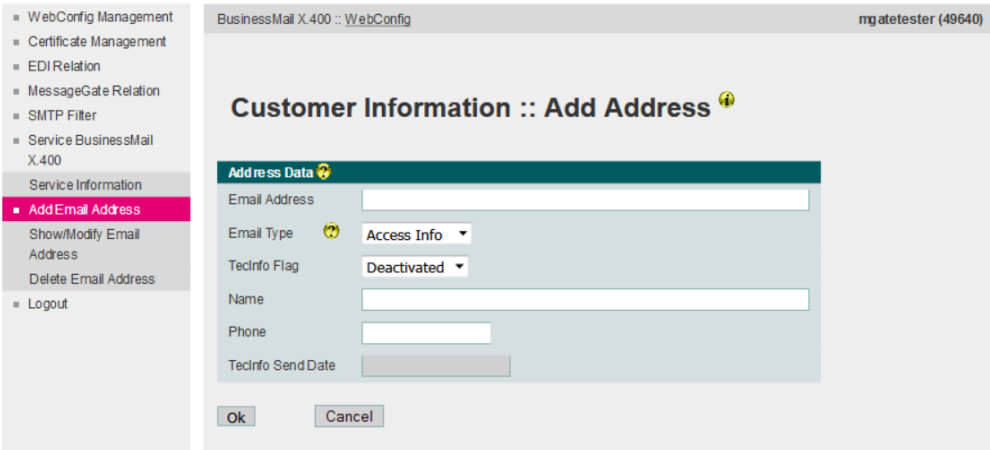
ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Service BusinessMail X.400 – Add Email Address (1)

■  Erleben, was verbindet.  



The screenshot shows the 'BusinessMail X.400 :: WebConfig' interface. On the left is a navigation menu with items: WebConfig Management, Certificate Management, EDI Relation, MessageGate Relation, SMTP Filter, Service BusinessMail X.400, Service Information, **Add Email Address** (highlighted), Show/Modify Email Address, Delete Email Address, and Logout. The main content area is titled 'Customer Information :: Add Address' with a help icon. Below this is a section titled 'Address Data' with a help icon. It contains the following fields: 'Email Address' (text input), 'Email Type' (dropdown menu with 'Access Info' selected), 'TecInfo Flag' (dropdown menu with 'Deactivated' selected), 'Name' (text input), 'Phone' (text input), and 'TecInfo Send Date' (text input). At the bottom of the form are 'Ok' and 'Cancel' buttons.

- In this menu item you may add beneath other contact information (Name, phone number) an Email address to receive information (either Access Info or TecInfo or Trouble Info). By default, the TecInfo address is not enabled to receive a TecInfo (the other two are always enabled). You may enable it directly or later in menu item Show/Modify. Please make sure that your Email service will deliver all Emails send with the originator address info@service-viat.de into this mailbox.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Service BusinessMail X.400 – Add Email Address (2)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

Customer Information :: Add Address

Add res Data

Email Address

Email Type

TecInfo Flag

Name

Phone

TecInfo Send Date

Ok Cancel

- If you own several X.400 accounts, you should configure Info Email addresses only in one of them. WebConfig does check that there is no duplicate address within this account but not within whole DB. So, if an Email address is configured several times in different accounts WebConfig will send a correspondent number of Info messages to this Email address.



ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Service BusinessMail X.400 – Modify Email Address (1)

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

Customer Information :: Change/Activate/Deactivate Address

Select Email Address

Filter:

Email Addresses	Email Type	TecInfo Flag
hans.huber@testag.de	TecInfo	Deactivated

- In this menu item you will see all configured Email addresses, the type and the status (TecInfo) of those addresses.
- Select an address via double click of mouse to view or modify this entry.






ERLEBEN, WAS VERBINDET.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Service BusinessMail X.400 – Modify Email Address (2)

...  Erleben, was verbindet. 

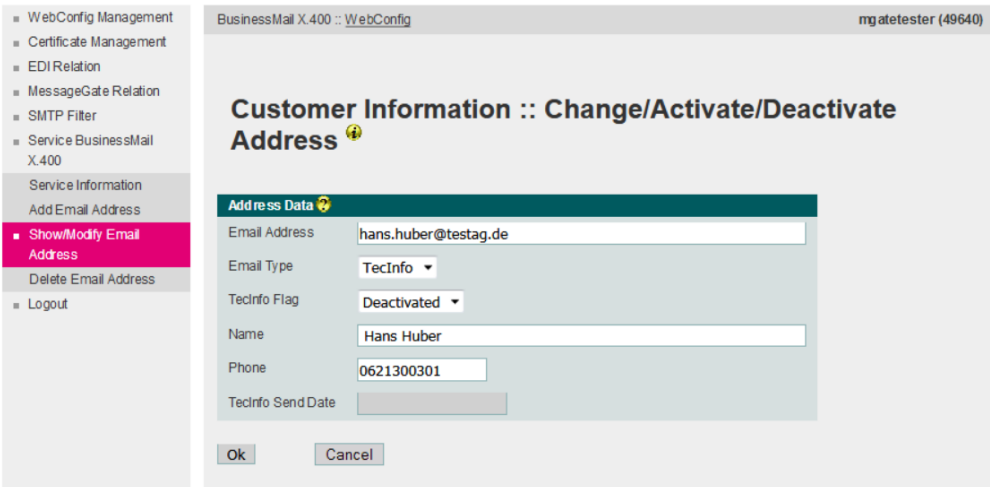

The screenshot shows the BusinessMail X.400 WebConfig interface. The left sidebar contains a menu with items: WebConfig Management, Certificate Management, EDI Relation, MessageGate Relation, SMTP Filter, Service BusinessMail X.400, Service Information, Add Email Address, Show/Modify Email Address (highlighted in pink), Delete Email Address, and Logout. The main content area is titled 'BusinessMail X.400 :: WebConfig' and 'mgatetester (49640)'. The main heading is 'Customer Information :: Change/Activate/Deactivate Address'. Below this is a form titled 'Address Data' with the following fields: Email Address (hans.huber@testag.de), Email Type (TecInfo), TecInfo Flag (Deactivated), Name (Hans Huber), Phone (0621300301), and TecInfo Send Date. At the bottom are 'Ok' and 'Cancel' buttons.

- In this menu item you may modify the contact information, an existing Email address, the type or in case of TecInfo enable/disable this address.
- “Send Date” will provide you the creation date of the last TecInfo send to this Email address.

BUSINESSMAIL X.400

WEB INTERFACE MESSAGEGATE

Service BusinessMail X.400 – Delete Email Address

Erleben, was verbindet.

BusinessMail X.400 :: WebConfig mgatetester (49640)

Customer Information :: Delete Address

Select Email Address

Filter:

Email Addresses	Email Type	Techno Flag
hans.huber@testag.de	Techno	Deactivated

- In this menu item you may delete an existing Email address.
- Select an address via double click of mouse to delete this entry.
- You must confirm to delete this Email address.



ERLEBEN, WAS VERBINDET.



BUSINESSMAIL X.400
THANK YOU!



ERLEBEN, WAS VERBINDET.